HONDA	Accessory	Application	Publications No.
INSTALLATION INSTRUCTIONS	**DOOR EDGE GUARDS**	**1999 ACCORD 2-DOOR**	**All 20037**
			Issue Date **OCT 1998**

PARTS LIST

Right front door edge guard

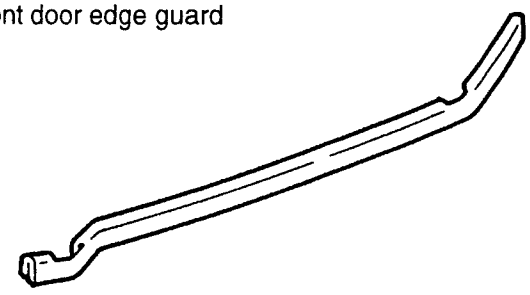

Left front door edge guard

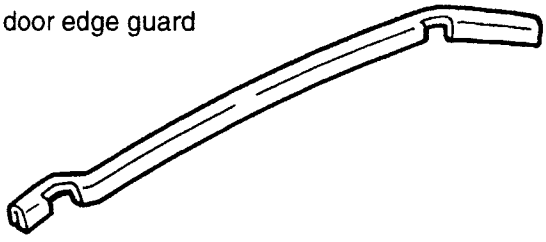

Hem sealant cutting tool



TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen

Touch-up paint

INSTALLATION

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.
3. Hold the guard against the inside edge of the door, and mark the sealant at the top and bottom of the ending points of the door edge guard.

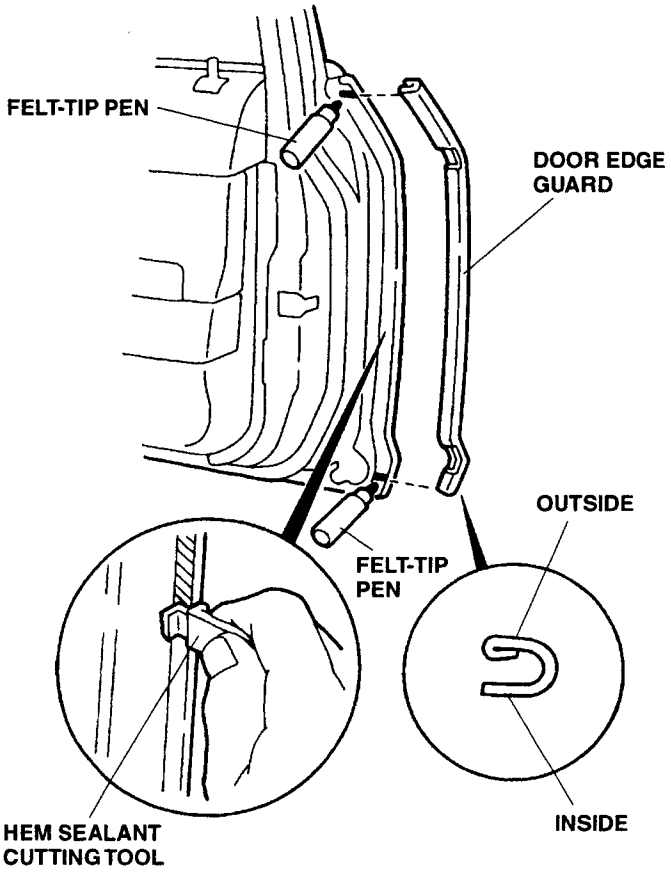

4. Position the hem sealant cutting tool against the door edge as shown, and trim the hem flange sealant from mark to mark.
5. Apply touch-up paint to the door, and let it dry.

1998 American Honda Motor Co., Inc - All Rights Reserved.

6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

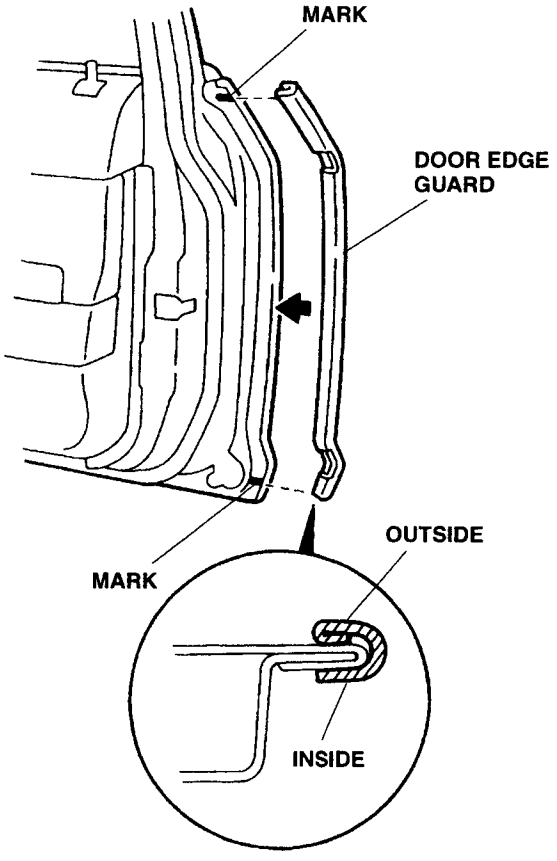

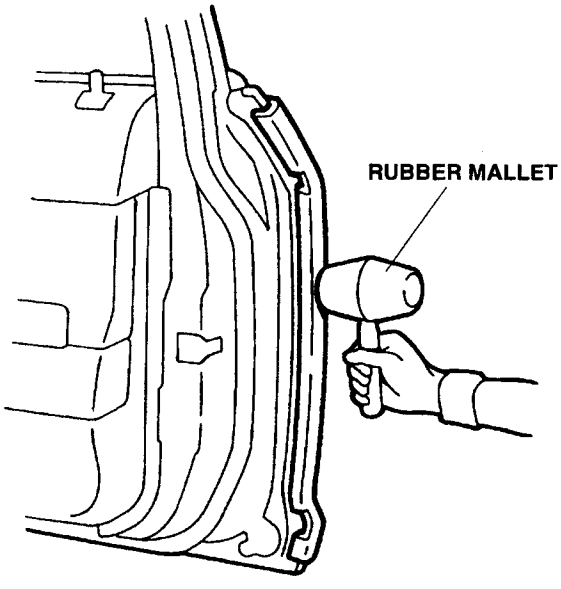

7. Repeat steps 2 through 6 to install the other door edge guard.

Installing the Rear Door Edge Guards

8. Repeat steps 2 through 6 to install both rear door edge guards. Start tapping at the wheelwell bend.

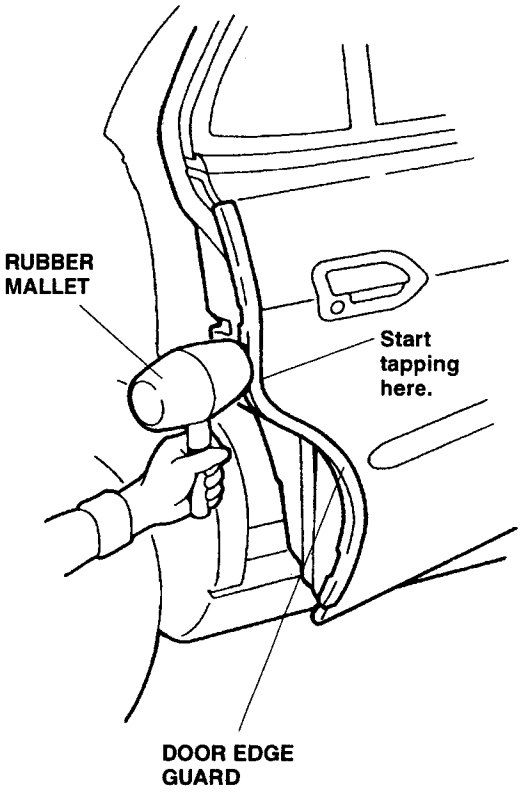

1998 American Honda Motor Co., Inc - All Rights Reserved.